




**Kuriyama of America, Inc.**  
 150 N MARTINGALE ROAD  
 SCHAUMBURG, IL 60173-5335 USA  
**Phone:** (847) 755-0360  
**Toll-Free FAX:** (800) 800-0320  
**International FAX:** (847) 885-0996 **Email:** [sales@kuriyama.com](mailto:sales@kuriyama.com)

## WT™ Series Food Grade PVC Material Handling Hose

Made in the USA

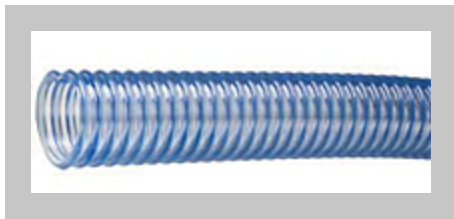

1

<u>Series Number</u>	<u>ID</u>	<u>OD</u>	<u>Working Pressure at 68°F</u>	<u>Working Pressure at 104°F</u>	<u>Vacuum Rating at 68°F</u>	<u>Vacuum Rating at 104°F</u>	<u>Min. Bending Radius at 68°F</u>	<u>Standard Length</u>	<u>Weight</u>
<u>WT100X100</u>	1 in 25.4 mm	1.30 in 33.0 mm	55 psi	30 psi	28 inHg	28 inHg	2.0 in	100 ft	0.21 lbs/ft
<u>WT100X50</u>	1 in 25.4 mm	1.30 in 33.0 mm	55 psi	30 psi	28 inHg	28 inHg	2.0 in	50 ft	0.21 lbs/ft
<u>WT125X100</u>	1 1/4 in 31.7 mm	1.60 in 40.6 mm	50 psi	25 psi	28 inHg	28 inHg	2.0 in	100 ft	0.28 lbs/ft
	1 1/4	1.60							

<u>Series Number</u>	<u>ID</u>	<u>OD</u>	<u>Working Pressure at 68°F</u>	<u>Working Pressure at 104°F</u>	<u>Vacuum Rating at 68°F</u>	<u>Vacuum Rating at 104°F</u>	<u>Min. Bending Radius at 68°F</u>	<u>Standard Length</u>	<u>Weight</u>
<u>WT125X50</u>	in 31.7 mm	in 40.6 mm	50 psi	25 psi	28 inHg	28 inHg	2.0 in	50 ft	0.28 lbs/ft
<u>WT150X100</u>	1 1/2 in 38.1 mm	1.92 in 48.8 mm	50 psi	25 psi	28 inHg	28 inHg	3.00 in	100 ft	0.35 lbs/ft
<u>WT150X50</u>	1 1/2 in 38.1 mm	1.92 in 48.8 mm	50 psi	25 psi	28 inHg	28 inHg	3.00 in	50 ft	0.35 lbs/ft
<u>WT200X100</u>	2 in 50.8 mm	2.40 in 61.0 mm	40 psi	20 psi	28 inHg	24 inHg	4 in	100 ft	0.56 lbs/ft
<u>WT200X50</u>	2 in 50.8 mm	2.40 in 61.0 mm	40 psi	20 psi	28 inHg	24 inHg	4 in	50 ft	0.56 lbs/ft
<u>WT225X100</u>	2 1/4 in 57.2 mm	2.74 in 69.6 mm	40 psi	20 psi	28 inHg	24 inHg	4.50 in	100 ft	0.65 lbs/ft
<u>WT225X50</u>	2 1/4 in 57.2 mm	2.74 in 69.6 mm	40 psi	20 psi	28 inHg	24 inHg	4.50 in	50 ft	0.65 lbs/ft
<u>WT250X100</u>	2 1/2 in 63.5 mm	2.99 in 75.9 mm	40 psi	20 psi	28 inHg	24 inHg	5.0 in	100 ft	0.77 lbs/ft
	2 1/2	2.99							

<u>Series Number</u>	<u>ID</u>	<u>OD</u>	<u>Working Pressure at 68°F</u>	<u>Working Pressure at 104°F</u>	<u>Vacuum Rating at 68°F</u>	<u>Vacuum Rating at 104°F</u>	<u>Min. Bending Radius at 68°F</u>	<u>Standard Length</u>	<u>Weight</u>
<u>WT250X50</u>	in 63.5 mm	in 75.9 mm	40 psi	20 psi	28 inHg	24 inHg	5.0 in	50 ft	0.77 lbs/ft
<u>WT300X100</u>	3 in 76.2 mm	3.64 in 92.5 mm	40 psi	20 psi	28 inHg	24 inHg	6.0 in	100 ft	1.10 lbs/ft
<u>WT300X50</u>	3 in 76.2 mm	3.64 in 92.5 mm	40 psi	20 psi	28 inHg	24 inHg	6.0 in	50 ft	1.10 lbs/ft
<u>WT350X100</u>	3 1/2 in 88.9 mm	4.21 in 107.0 mm	35 psi	18 psi	28 inHg	24 inHg	8.0 in	100 ft	1.48 lbs/ft
<u>WT350X50</u>	3 1/2 in 88.9 mm	4.21 in 107.0 mm	35 psi	18 psi	28 inHg	24 inHg	8.0 in	50 ft	1.48 lbs/ft
<u>WT400X100</u>	4 in 101.6 mm	4.72 in 120.0 mm	35 psi	18 psi	24 inHg	22 inHg	10 in	100 ft	1.80 lbs/ft
<u>WT400X50</u>	4 in 101.6 mm	4.72 in 120.0 mm	35 psi	18 psi	24 inHg	22 inHg	10 in	50 ft	1.80 lbs/ft
<u>WT500X100</u>	5 in 127.0 mm	5.74 in 145.8 mm	30 psi	15 psi	24 inHg	22 inHg	16 in	100 ft	2.34 lbs/ft

<u>Series Number</u>	<u>ID</u>	<u>OD</u>	<u>Working Pressure at 68°F</u>	<u>Working Pressure at 104°F</u>	<u>Vacuum Rating at 68°F</u>	<u>Vacuum Rating at 104°F</u>	<u>Min. Bending Radius at 68°F</u>	<u>Standard Length</u>	<u>Weight</u>
<u>WT500X50</u>	5 in 127.0 mm	5.74 in 145.8 mm	30 psi	15 psi	24 inHg	22 inHg	16 in	50 ft	2.34 lbs/ft
<u>WT500X20</u>	5 in 127.0 mm	5.74 in 145.8 mm	30 psi	15 psi	24 inHg	22 inHg	16 in	20 ft	2.34 lbs/ft
<u>WT600X100</u>	6 in 152.4 mm	6.91 in 175.5 mm	30 psi	15 psi	24 inHg	22 inHg	18 in	100 ft	3.70 lbs/ft
<u>WT600X50</u>	6 in 152.4 mm	6.91 in 175.5 mm	30 psi	15 psi	24 inHg	22 inHg	18 in	50 ft	3.70 lbs/ft
<u>WT600X20</u>	6 in 152.4 mm	6.91 in 175.5 mm	30 psi	15 psi	24 inHg	22 inHg	18 in	20 ft	3.70 lbs/ft
<u>WT800X50</u>	8 in 203.2 mm	8.97 in 227.8 mm	20 psi	10 psi	20 inHg	18 inHg	36 in	50 ft	5.53 lbs/ft
<u>WT800X20</u>	8 in 203.2 mm	8.97 in 227.8 mm	20 psi	10 psi	20 inHg	18 inHg	36 in	20 ft	5.53 lbs/ft
<u>WT45MX100</u>	1.77 in 45.0 mm	2.09 in 53.0 mm	45 psi	25 psi	28 inHg	24 inHg	4 in	50 ft	0.44 lbs/ft
	1.77	2.09							

<u>Series Number</u>	<u>ID</u>	<u>OD</u>	<u>Working Pressure at 68°F</u>	<u>Working Pressure at 104°F</u>	<u>Vacuum Rating at 68°F</u>	<u>Vacuum Rating at 104°F</u>	<u>Min. Bending Radius at 68°F</u>	<u>Standard Length</u>	<u>Weight</u>
<u>WT45MX50</u>	in 45.0 mm	in 53.0 mm	45 psi	25 psi	28 inHg	24 inHg	4 in	50 ft	0.44 lbs/ft
<u>WT57MX100</u>	2.24 in 57.0 mm	2.68 in 68.0 mm	40 psi	20 psi	28 inHg	24 inHg	4.50 in	50 ft	0.64 lbs/ft
<u>WT57MX50</u>	2.24 in 57.0 mm	2.68 in 68.0 mm	40 psi	20 psi	28 inHg	24 inHg	4.50 in	50 ft	0.64 lbs/ft
<u>WT60MX100</u>	2.36 in 60.0 mm	2.80 in 71.1 mm	40 psi	20 psi	28 inHg	24 inHg	4.50 in	100 ft	0.71 lbs/ft
<u>WT60MX50</u>	2.36 in 60.0 mm	2.80 in 71.1 mm	40 psi	20 psi	28 inHg	24 inHg	4.50 in	50 ft	0.71 lbs/ft