Kuriyama of America, Inc.
150 N MARTINGALE ROAD
SCHAUMBURG, IL 60173-5335 USA
Phone: (847) 755-0360
Toll-Free FAX: (800) 800-0320
International FAX: (847) 885-0996 **Email:** sales@kuriyama.com

CLEARBRAID® K3150 Series Reinforced PVC Beverage Hose

A lightweight standard wall crystal clear Phthalate Free yarn reinforced hose suitable for a wide variety of food and beverage applications.

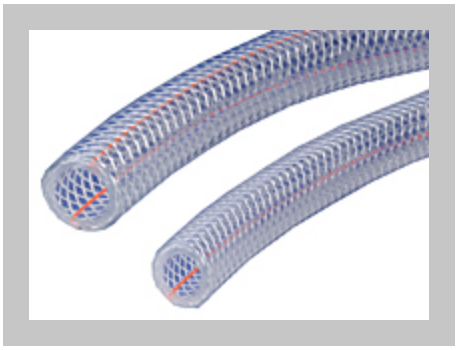

1

Part Number	Nominal ID	Nominal OD	Max. Working Pressure at 70ºF (20ºC)	Max. Working Pressure at 122ºF (50ºC)	Standard Lengths	Approx. Wt. per Pkg.
K3150-03X100	3/16 in 4.8 mm	0.375 in 9.5 mm	250 psi	150 psi	100 ft	4 lb
K3150-03X300	3/16 in 4.8 mm	0.375 in 9.5 mm	250 psi	150 psi	300 ft	13 lb
K3150-04X100	1/4 in 6.5 mm	0.438 in 11.1 mm	250 psi	150 psi	100 ft	6 lb
K3150-04X300	1/4 in 6.5 mm	0.438 in 11.1 mm	250 psi	150 psi	300 ft	17 lb

Part Number	Nominal ID	Nominal OD	Max. Working Pressure at 70ºF (20ºC)	Max. Working Pressure at 122ºF (50ºC)	Standard Lengths	Approx. Wt. per Pkg.
K3150-05X100	5/16 in 7.9 mm	0.531 in 13.5 mm	250 psi	135 psi	100 ft	8 lb
K3150-05X300	5/16 in 7.9 mm	0.531 in 13.5 mm	250 psi	135 psi	300 ft	24 lb
K3150-06X100	3/8 in 9.5 mm	0.594 in 15.1 mm	225 psi	125 psi	100 ft	9 lb
K3150-06X300	3/8 in 9.5 mm	0.594 in 15.1 mm	225 psi	125 psi	300 ft	27 lb
K3150-08X100	1/2 in 12.7 mm	0.750 in 19.1 mm	200 psi	100 psi	100 ft	13 lb
K3150-08X300	1/2 in 12.7 mm	0.750 in 19.1 mm	200 psi	100 psi	300 ft	40 lb
K3150-10X100	5/8 in 15.9 mm	0.891 in 22.6 mm	200 psi	100 psi	100 ft	18 lb
K3150-10X200	5/8 in 15.9 mm	0.891 in 22.6 mm	200 psi	100 psi	200 ft	35 lb
K3150-12X100	3/4 in 19.1 mm	1.031 in 26.2 mm	150 psi	85 psi	100 ft	22 lb
K3150-12X200	3/4 in 19.1 mm	1.031 in 26.2 mm	150 psi	85 psi	200 ft	43 lb
K3150-16X100	1 in 25.4 mm	1.300 in 33.0 mm	125 psi	75 psi	100 ft	30 lb
K3150-16X200	1 in 25.4 mm	1.300 in 33.0 mm	125 psi	75 psi	200 ft	59 lb
K3150-20X50	1 1/4 in 31.8 mm	1.620 in 41.1 mm	100 psi	55 psi	50 ft	23 lb
K3150-20X100	1 1/4 in 31.8 mm	1.620 in 41.1 mm	100 psi	55 psi	100 ft	45 lb

Part Number	Nominal ID	Nominal OD	Max. Working Pressure at 70ºF (20ºC)	Max. Working Pressure at 122ºF (50ºC)	Standard Lengths	Approx. Wt. per Pkg.
K3150-24X50	1 1/2 in 38.1 mm	1.938 in 49.2 mm	100 psi	50 psi	50 ft	32 lb
K3150-24X100	1 1/2 in 38.1 mm	1.938 in 49.2 mm	100 psi	50 psi	100 ft	64 lb
K3150-32X50	2 in 50.8 mm	2.490 in 63.2 mm	75 psi	35 psi	50 ft	47 lb
K3150-32X100	2 in 50.8 mm	2.490 in 63.2 mm	75 psi	35 psi	100 ft	94 lb
K3150-MM04x100	0.157 in 4.0 mm	0.354 in 9.0 mm	250 psi	150 psi	100 ft	4 lb
K3150-MM06x100	0.236 in 6.0 mm	0.433 in 11.0 mm	250 psi	150 psi	100 ft	6 lb
K3150-MM08x100	0.315 in 8.0 mm	0.531 in 13.5 mm	250 psi	135 psi	100 ft	8 lb
K3150-MM10x100	0.394 in 10.0 mm	0.630 in 16.0 mm	225 psi	125 psi	100 ft	10 lb
K3150-MM12x100	0.472 in 12.0 mm	0.709 in 18.0 mm	200 psi	100 psi	100 ft	12 lb
K3150-MM19x100	0.748 in 19.0 mm	1.024 in 26.0 mm	150 psi	85 psi	100 ft	21 lb